


# AIR6N0-C-MB NX 4×TVI

YUAN  
Visualize Intelligent Planet

## Card Size AI Edge with Multi AIoT Expansion

### Features

- Powered by NVIDIA Jetson Orin™ NX up to 100 / 70 TOPS
- Business Card Size
- 4×TVI In
- 2×M.2, Gen 4×2 M Key / Gen 4×1 E Key
- 1×USB3.2 Gen2
- 1×Mini DisplayPort



### Specifications



| System                   |  |   |
|--------------------------|--|---|
| CPU                      | NVIDIA Jetson Orin™ NX 8GB<br>6-Core Arm® Cortex®-A78AE v8.2 64-Bit CPU<br>1.5MB L2 + 4MB L3 | NVIDIA Jetson Orin™ NX 16GB<br>8-Core Arm® Cortex®-A78AE v8.2 64-Bit CPU<br>2MB L2 + 4MB L3 |
| GPU                      | 1024-Core NVIDIA Ampere Architecture GPU<br>with 32 Tensor Cores                             |   |
| AU Performance           | NVIDIA Jetson Orin™ NX 8GB<br>70 TOPS  | NVIDIA Jetson Orin™ NX 16GB<br>100 TOPS   |
| System Memory            | NVIDIA Jetson Orin™ NX 8GB<br>8GB LPDDR5   | NVIDIA Jetson Orin™ NX 16GB<br>16GB LPDDR5  |
| Interface                |  |   |
| Storage                  | Supports External NVMe<br>1×Micro SD Card Slot   |   |
| Display Interface        | 1×Mini DP1.4   |   |
| Ethernet                 | 1×RJ45 for 10/100/1000Mbps Ethernet<br>DHCP Client   |   |
| Expansion Slot           | 1×M.2 2230 M Key PCIe Gen4×2 Slot<br>1×M.2 2230 E Key PCIe Gen4×1 Slot                       |   |
| USB                      | 1×USB3.2 Gen2 ( Type-C )   |   |
| MIPI                     | 2×4MIPI CSI-2 Lanes ( D-PHY 2.1, Support MIPI Camera, Capture Card )                         |   |
| Peripheral Communication | 10 Pin Header<br>1×USB2.0<br>4×GPIO<br>1×I2C   |   |
|                          | 6 Pin Wafer<br>1×UART(*)   |   |
|                          | 2×6 Pin Header<br>3×GPIO<br>1×RS485<br>1×I2C   |   |
| Misc. Features           | 8 Pin Phoenix Connector<br>1×RS232(*)<br>1×I2C<br>1×GPIO                                     |   |
|                          | * Please select either 1×UART or 1×RS232 to use  |   |
|                          | Firmware Upgradable  |   |

### Key points

| Video Interface |       |
|-----------------|-------|
| Video Input     | 4×TVI |

## SDK/Software

| Video Feature       |  |
|---------------------|--|
| Video Encode        | AV1 ( UHP )<br>1×4K60   3×4K30   6×1080p60   12×1080p30  |
|                     | H.265 ( UHP )<br>1×4K60   3×4K30   6×1080p60   12×1080p30  |
|                     | H.264 ( UHP )<br>1×4K60   2×4K30   5×1080p60   11×1080p30  |
| Video Decode        | AV1 ( Main Profile )<br>1×8K30   2×4K60   4×4K30   9×1080p60   20×1080p30  |
|                     | H.265 ( Main, Main10 )<br>1×8K30   2×4K60   4×4K30   9×1080p60   18×1080p30  |
|                     | H.264 ( Baseline, Main, High )<br>1×4K60   2×4K30   5×1080p60   11×1080p30   |
|                     | VP9 ( Profile 0, Profile 2 )<br>1×4K60   3×4K30   7×1080p60   15×1080p30   |
| SDK                 |  |
| QCAP                | Capture<br>High Performance Renderer<br>Image Snapshot<br>Deinterlace, Alpha Blending Engine<br>Auto Signal Detection<br>2D/3D Video, Audio and VANC Streams Capture   |
|                     | Record<br>Encrypt / Sync / Clone / Recording<br>Time-Shifting / Rewind / Pre-Event / Recording<br>Multi-Streams ( 3D ) Recording<br>Animation Transition Effect<br>Video Cropping, Scaling and Alpha Blending Engine   |
|                     | Stream<br>2D/3D Universal Stream Client<br>2D/3D Multi-Streams Stream Server<br>RTSP, RTMP, HLS, SRT, TS, WebRTC. NDI-HX (*), Full NDI (*), Dante AV-H (*)<br>Animation Transition Effect<br>Video Cropping, Scaling and Alpha Blending Engine<br>*Separate License Required |
| QDEEP               | AI SDK Integrated Multiple Algorithms and Deep-Learning Models in Various Fields of Applications<br>Face Recognition<br>Objects Detection<br>Objects Segment<br>Optical Character Recognition<br>License Plate Recognition<br>Customizable Video AI Functions Upon Request   |
| Software (Optional) |  |
| Xtremer             | Web Based User Interface   |
|                     | Encode / Decode<br>AV1, H.26X  |
|                     | Color Format Adjust<br>444 / 422 / 420, 10Bit / 8Bit Select  |
| SCP                 | Record<br>MP4, TS  |
|                     | Stream / Network<br>RTSP, RTMP, HLS, SRT, TS, WebRTC. NDI-HX (*), Full NDI (*)<br>Dante AV-H (*)<br>*Separate License Required   |
|                     | Stream<br>Multi-Streams Stream Server<br>RTSP, RTMP, HLS, SRT, TS, WebRTC, Full NDI (*), NDI-HX (*),<br>Dante AV-H(*)<br>*: Separate License Required  |

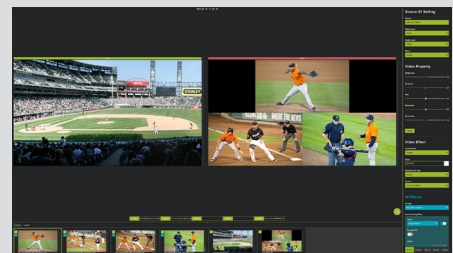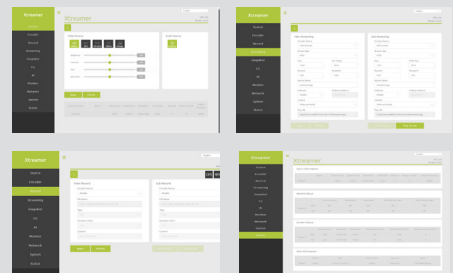

## Environment


### Development Environment

|        |  |
|--------|--|
| OS     | Ubuntu: 20.04                          |
| Kernel | 5.10.104-tegra or Higher               |
| BSP    | Linux for Tegra(L4T) R35.3.1 or Higher |
| SDK    | JetPack 5.1.1 or Higher                |

### Environment

|                       |   |
|-----------------------|---|
| Power Supply          | DC input : 9~24V                        |
| Power Consumption     | TBA                                     |
| Operating Temperature | Standard Version: 0~60 ° C with Airflow |
| Storage Temperature   | -20~80 ° C                              |


## Mechanical

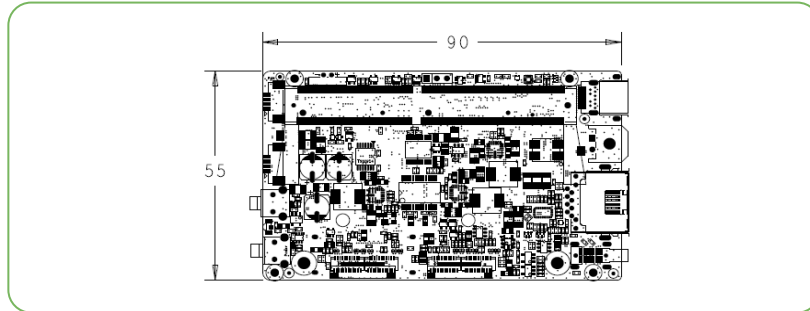

- Dimension of main Board: 90mm×55mm
- Weight: 181g (Including SOM, Fan and Daughter Board)



## IO Layout

- Carrier Board

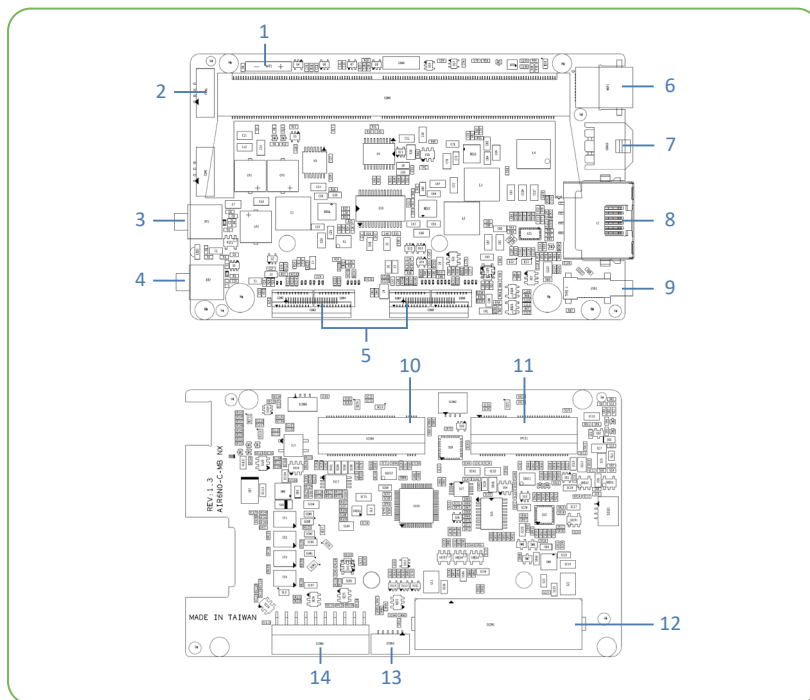

1. Battery
2. FAN
3. Recovery
4. Power
5. MIPI
6. Mini DisplayPort1.4
7. DC Pin Header (19V)
8. RJ45
9. USB3.2 Gen 2 Type-C
10. M.2 2230 M Key (PCIe Gen4×2)
11. M.2 2230 E Key (PCIe Gen4×1)
12. 80 Pin Header (Connect with Daughter Board)
13. 6 Pin Wafer
14. 10 Pin Header

• Daughter Board

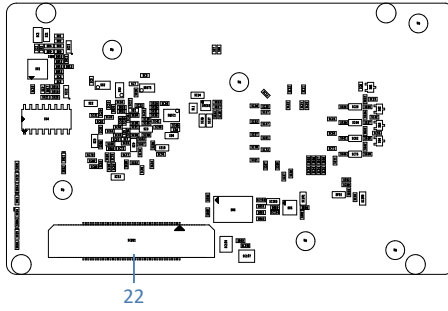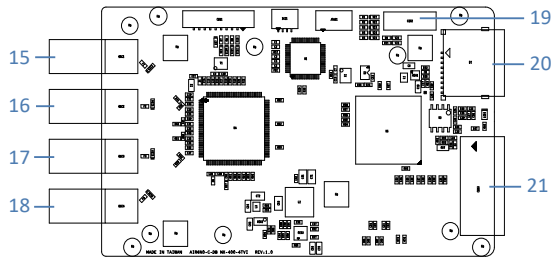

- 15. TVI In CH1
- 16. TVI In CH2
- 17. TVI In CH3
- 18. TVI In CH4
- 19. 2×6 Pin Header
- 20. Micro SD Card Slot
- 21. 8 Pin Phoenix Connector
- 22. 80 Pin Header (Connect with Carrier Board)

\* All registered trademarks are the property of their owners. The photo is for reference only.

\* Technology License Patent Royalty. Supplier ( YUAN Technology Ltd. ) as an OEM vendor is not responsible for any royalties applied to the Models and collected by any patent or trade mark holders or his exclusive, non-exclusive.

Licensees or representatives such as MPEGLA, Dolby, Thomson, Sisvel, H.264, MPEG4 and any other natural or legal person. All concerning royalties of patents and trade marks will be paid or negotiated with the above mentioned owner by you. In case of any patent or trademark infringement you are responsible for all necessary processes and costs. You accept and acknowledge that all prices of Models offered by supplier are exclusive of any royalties, charges or license fees for any patents in any countries or areas.

