

VPP6N0 IGX 700

1705 TOPS of AI Computing by NVIDIA RTX A6000 Ada

YUAN
Visualize Intelligent Planet

Features

- Powered by NVIDIA IGX Orin™ and NVIDIA® RTX A6000 Ada
- NVIDIA IGX Orin™ Motherboard
- Up to 1705 TOPS AI Performance
- 2×100Gb QSFP28 Port, 2×1Gb RJ45 Port
- 1×PCIe Gen5×8
- 8×USB3.2 Gen2



Specifications

System	
CPU	NVIDIA IGX Orin™ 12-core Arm® Cortex®-A78AE v8.2 64-Bit CPU 3MB L2 + 6MB L3
GPU	NVIDIA IGX Orin™ 2048-Core NVIDIA Ampere Architecture GPU with 64 Tensor Cores NVIDIA RTX A6000 Ada 48 GB GDDR6 Memory, 960 GB/s MemoryBandwidth 18176-Core NVIDIA Ampere Architecture GPU with 568 Tensor Cores
AI Performance	1705 TOPS
System Memory	Memory: 64GB LPDDR6
Interface	
Storage	64GB eMMC 5.1 (On NVIDIA IGX Orin™ Module) 4×SATA
Display Interface	4×DP1.4a
Ethernet	2×100Gb QSFP28 Port 2×RJ45 for 10/100/1000Mbps Ethernet DHCP Client
Expansion Slot	PCIe 1×PCIe Gen5×16 Slot (With 8 PCIe Lanes) M.2 1×M.2 2230 E Key USB2.0/PCIe Gen2×1 Slot 1×M.2 2280 M Key PCIe Gen4×4 Slot
USB	4×USB3.2 Gen2 (Type-A) 4×USB3.2 Gen2 (Pin Header) 1×USB3.2 Gen2 (Type-C)
MIPI	16×MIPI CSI Lanes (Support MIPI Camera, Capture Card)
Audio	1×3.5mm Line Out 1×3.5mm MIC in
Perherial Communication	4×COM Port (Pin Header) 10×GPIO (Pin Header) CAN Bus (Pin Header)
Misc. Features	Firmware Upgradable

Key Points

GPU Support	
NVIDIA RTX A6000	V

Add-On Cards / SDK / Software

Video Feature				
	PCIe Model	Interface	Max. Resolution	Capture / Preview
Capture Card (Optional)	SC750N1-L HDMI2.1	1×HDMI2.1	7680×4320p@60/50fps	4:2:2 10Bit P210
	SC720N1-L DP1.4	1×DP1.4	7680×4320p@30/25fps	4:2:0 10Bit P010
	SC720N4 HDMI2.0	4×HDMI2.0	4096×2160p@60/50fps	4:4:4 8Bit YV24
	SC720N4 12G-SDI	4×12G-SDI	4096×2160p@60/50fps	4:4:4 8Bit RGB32 / 24
	SC710N2-L HDMI2.0	2×HDMI2.0	4096×2160p@60/50fps	4:2:2 8Bit YUY2
	SC710N2 12G-SDI	2×12G-SDI, 8×3G-SDI	4096×2160p@60/50fps	4:2:0 8Bit YV12, NV12
Video Encode	H.265 (HEVC) 1×8K30 3×4K60 7×4K30 14×1080p60 29×1080p30			
	H.264 3×4K60 7×4K30 14×1080p60 29×1080p30			
Video Decode	H.265 (HEVC) 2×8K60 5×8K30 11×4K60 23×4K30 47×1080p60 94×1080p30			
	H.264 6×4K60 12×4K30 24×1080p60 49×1080p30			
SDK				
QCAP	Capture High Performance Renderer Image Snapshot Deinterlace, Alpha Blending Engine Auto Signal Detection 2D/3D Video, Audio and VANC Streams Capture			
	Record Encrypt / Sync / Clone / Recording Time-Shifting / Rewind / Pre-Event / Recording Multi-Streams (3D) Recording Animation Transition Effect Video Cropping, Scaling and Alpha Blending Engine			
	Stream 2D/3D Universal Stream Client 2D/3D Multi-Streams Stream Server RTSP, RTMP, HLS, SRT, TS, WebRTC., Full NDI (*), NDI-HX (*), Dante AV-H (*) Animation Transition Effect Video Cropping, Scaling and Alpha Blending Engine *Separate License Required			
QDEEP	AI SDK Integrated Multiple Algorithms and Deep-Learning Models in Various Fields of Applications Access Control Objects Detection Objects Segment Optical Character Recognition License Plate Recognition Customizable Video AI Functions Upon Request			



SC750N1-L HDMI2.1



SC720N1-L DP1.4a



SC720N4 HDMI2.0





SC720N4 12G-SDI



SC710N2-L HDMI2.0



SC710N2 12G-SDI

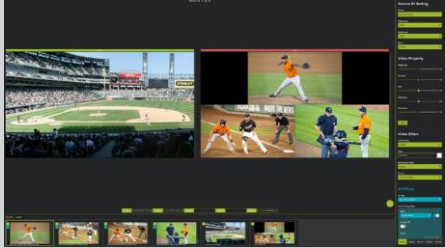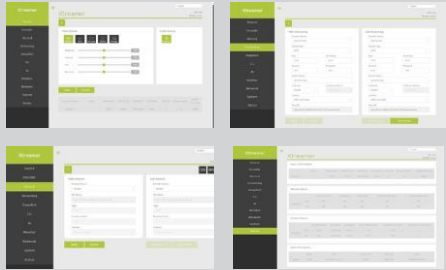
Software (Optional)		
Stream Catcher Pro	Capture Auto Signal Detection Deinterlace, OSD, Color Adjustment Image Snapshot Animation Transform Effect for PGM	
	Record AV1, H.26X MP4, TS Multi-Stream Recording Schedule Recording	
	Stream Multi-Streams Stream Server RTSP, RTMP, HLS, SRT, TS, WebRTC., Full NDI (*), NDI-HX (*), Dante AV-H (*) *Separate License Required	
Xtreamer	Web Based User Interface	
	Encode / Decode AV1, H.26X	
	Color Format Adjust 444 / 422 / 420, 10Bit / 8Bit Select	
	Record MP4, TS	
	Stream / Network RTSP, RTMP, HLS, SRT, TS, WebRTC., Full NDI (*), NDI-HX (*), Dante AV-H (*) *Separate License Required	

Environment

Development Environment	
OS	Ubuntu: 20.04
Kernel	5.10.104-tegra or Higher
BSP	Linux for Tegra(L4T) R35.4.0 or Higher
SDK	TBA
Environment	
Power Supply	100-240V
Power Consumption	850W
Operating Temperature	Standard Version: 5~45 °C with Airflow
Storage Temperature	-20~85 °C


Mechanical

- Dimension of case: 288mm×380mm×160mm
- Dimension of main Board: 238.84mm×198.98mm
- Weight: 6.8Kg

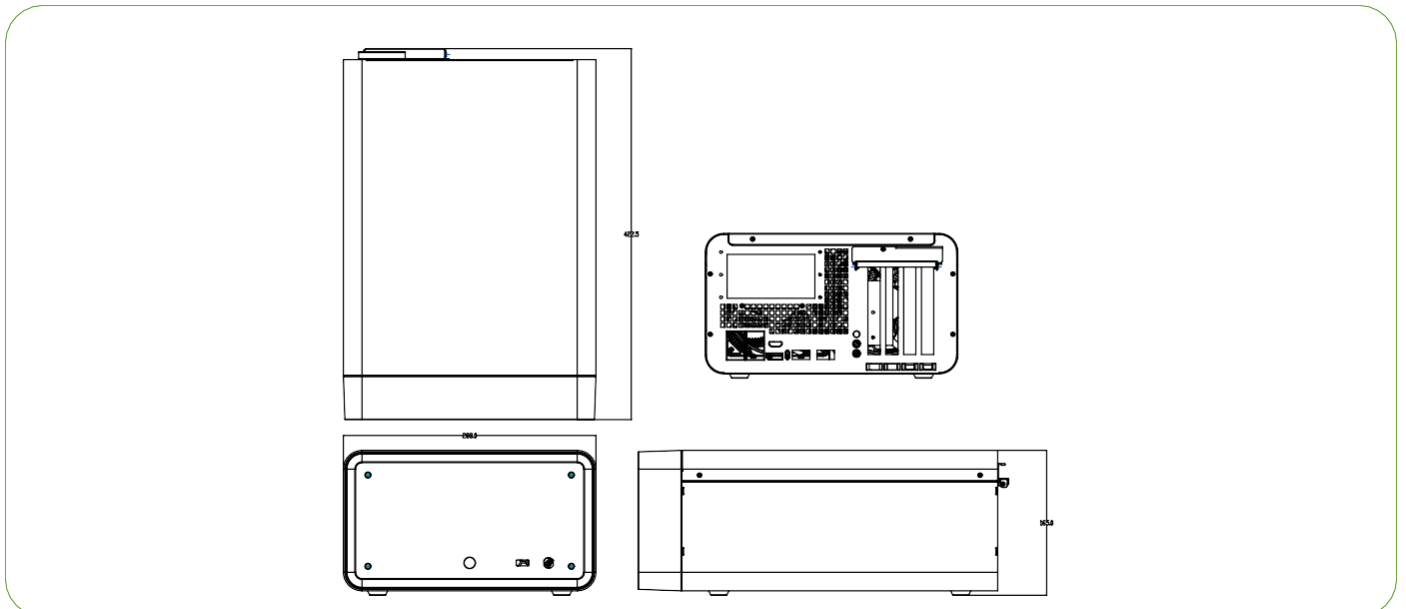

I/O Layout

- Case

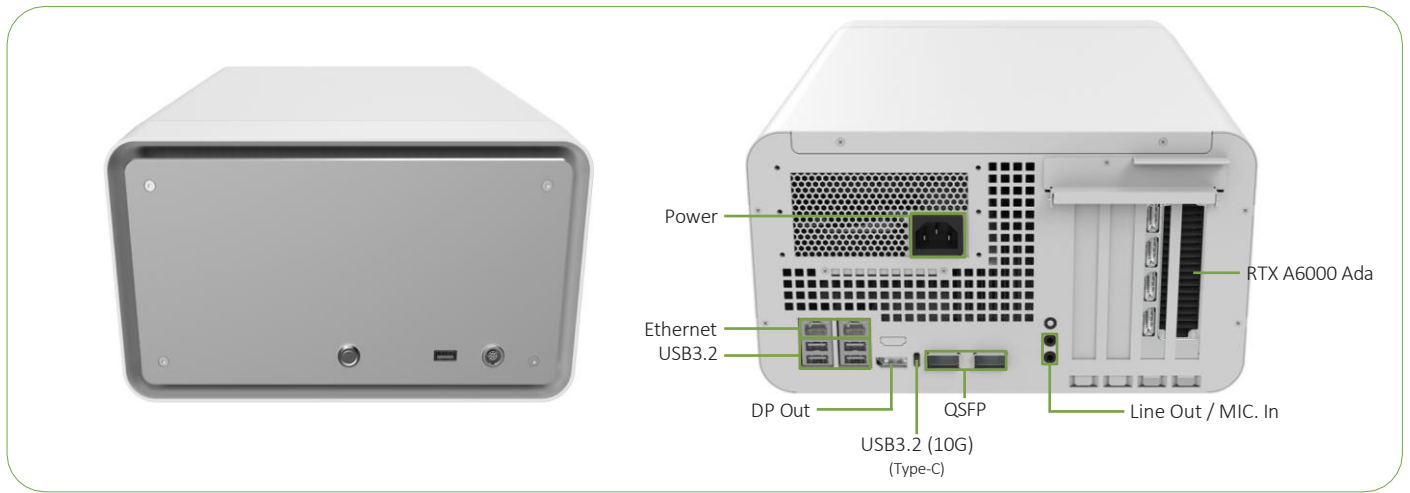

* All registered trademarks are the property of their owners. The photo is for reference only.

* Technology License Patent Royalty. Supplier (YUAN Technology Ltd.) as an OEM vendor is not responsible for any royalties applied to the Models and collected by any patent or trade mark holders or his exclusive, non-exclusive.

Licensees or representatives such as MPEG4, Dolby, Thomson, Sisvel, H.264, MPEG4 and any other natural or legal person. All concerning royalties of patents and trade marks will be paid or negotiated with the above mentioned owner by you. In case of any patent or trademark infringement you are responsible for all necessary processes and costs. You accept and acknowledge that all prices of Models offered by supplier are exclusive of any royalties, charges or license fees for any patents in any countries or areas.

